


# Unisto Metalo 25



Security  
Logistics  
Identification  
Control



# Unisto Metalo 25

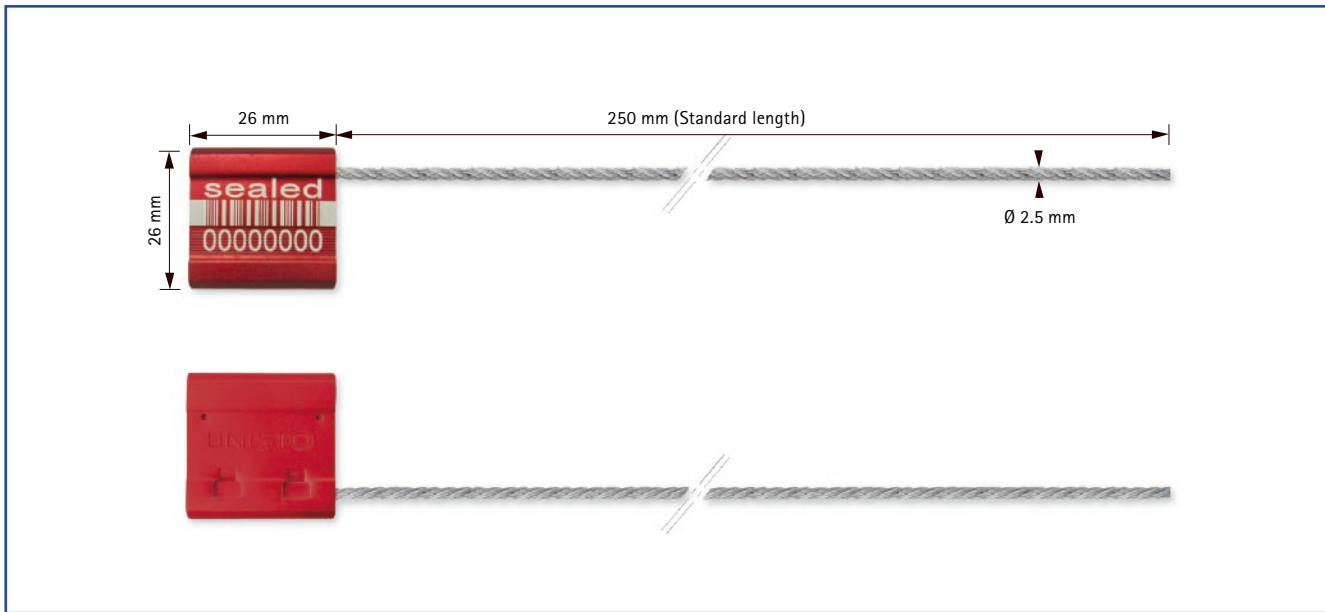

## Destructive Tests (ISO/IEC PAS 17712)

**Tensile:** Above 5.0 kN  
**Shear:** Below 227 kg-f  
**Bend:** Above 501 Cycles (Flexible Seal)  
**Impact (low temperature):**  
     Below 27.12 J  
**Impact (high temperature):**  
     Below 27.12 J

## Identifications Outer Casing

**Specification:** Laser Marked or Engraved  
**Logo/Abbreviations:** Alphabets or 2 dimensional graphic  
**Serial Numbers:** Max. 7 digits Alphanumeric or Barcode

## Material

**Seal Casing (Outer Casing and Inner Insert):**  
     Aluminium Alloy  
**Cable:** Non-Preformed 7x7 Galvanised  
     Air Craft Cable  
**Locking Mechanism (Inter-locking Roller):**  
     Heat-treated Carbon Steel  
**Locking Mechanism (Tension Spring):**  
     Heat-treated High Tensile Steel

## Packaging

**Packing:** 10 sequentially Seals  
     bundled with Rubber Band  
     25 sequentially Bundles per Carton  
**Quantity:** 250 Seals per Carton  
**Carton Dimensions:** L 310 mm x W 248 mm x H 135 mm  
**Carton Weight:** Approximate 5,22 kg

## Dimensions

**Seal Casing (Outer Casing):**  
     L 26.0 mm x W 26.0 mm x T 8.5 mm  
**Seal Casing (Inner Insert):**  
     L 26.0 mm x W 12.0 mm x T 4.3 mm  
**Cable:** OD 2.5 mm x L 250 mm  
     (Standard length)  
**Locking Mechanism (Inter-locking Roller):**  
     OD 7.2 mm x T 2.3 mm  
**Locking Mechanism (Tension Spring):**  
     OD 3.5 mm x L 8.0 mm x 9 Coils

## Others

**Colours:** Blue, Green, Orange, Yellow, Red, White  
     (Special Colours on request)